

STROBE-BRIK™

SB-040QD and SB-041QD Single Color and RGB LED Strobes Architectural-use, DMX-controlled SB-04XQD series

LED Strobe Power!

Use the LED Strobe-Brik system to add color sparkle to your iconic architecture. The LED Strobe-Brik system provides individual DMX control of hundreds of powerful LED strobes. The SB-040QD and SB-041QD strobes use high quality CREE LEDs, providing high light output and maximum efficacy.

Applications

- Icon architecture
- Casinos
- Theme park attraction and effect lighting
- Stage shows

Features

- Mount indoor/outdoor
- Integrated heat sink design provides for powerfully bright strobe or continuous-duty effects
- Strobes are individually DMX-addressed for complete control
- Exterior-rated IP-65 housing
- Integrated with any number of related effects
- Through-wall or exterior mounting options
- Available frosted or clear lens

Available colors

- SB-040QD-WHC, Cool White
- SB-040QD-WHN, Neutral White
- SB-040QD-WHW, Warm White
- SB-040QD-RGBW-C, RGB Cool White
- SB-040QD-RGBW-N, RGB Neutral White
- SB-041QD-WHC, Cool White, LED set at 45°
- SB-041QD-WHN, Neutral White, LED set at 45°
- SB-041QD-WHW, Warm White, LED set at 45°
- SB-041QD-RGBW-C, RGB Cool White, LED set at 45°
- SB-041QD-RGBW-N, RGB Neutral White, LED set at 45°

*Other colors available upon request



SB-040QD front



SB-040QD rear



SB-040QD front
with mounting disk



SB-041QD front
LED set at 45°

STROBE-BRIK™

SB-040QD and SB-041QD Single Color and RGB LED Strobes Architectural-use, DMX-controlled SB-04XQD series

Specifications


- White max current = 1000mA, RGB max current = 1000mA/channel
- 1.73" dia. X 4.65" long
- For use with 1500mA LED Brik-16 and Brik-32 controllers
- One DMX address per single-color strobe, four addresses per RGB strobe

Part Number	Type	Watts @1000mA	Luminous Flux [Lm] @ 1000 mA	Dominant Wave-length [nm]	Viewing Angle [Degrees]
SB-040QD-WHC	Cool White	~3.0	385	5000-8300K	125
SB-040QD-WHN	Neutral White	~3.0	357	3700-5000K	125
SB-040QD-WHW	Warm White	~3.0	302	2600-3700K	125
SB-040QD-RGBW-C	RGB Cool White	2.7/3.8/3.4/3.4	117/156/31/225	625/528/458/6850K	130
SB-040QD-RGBW-N	RGB Neutral White	2.7/3.8/3.4/3.4	117/156/31/225	625/528/458/4000K	130
SB-041QD-WHC	Cool White	~3.0	385	5000-8300K	125
SB-041QD-WHN	Neutral White	~3.0	357	3700-5000K	125
SB-041QD-WHW	Warm White	~3.0	302	2600-3700K	125
SB-041QD-RGBW-C	RGB Cool White	2.7/3.8/3.4/3.4	117/156/31/225	625/528/458/6850K	130
SB-041QD-RGBW-N	RGB Neutral White	2.7/3.8/3.4/3.4	117/156/31/225	625/528/458/4000K	130


STROBE-BRIK™

SB-040QD and SB-041QD Single Color and RGB LED Strobes
Architectural-use, DMX-controlled SB-04XQD series

SB-040QD with Mounting Disk

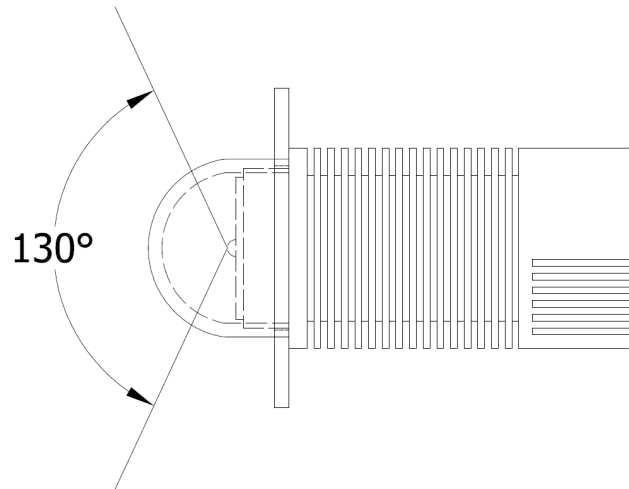


SB-041QD with Mounting Disk

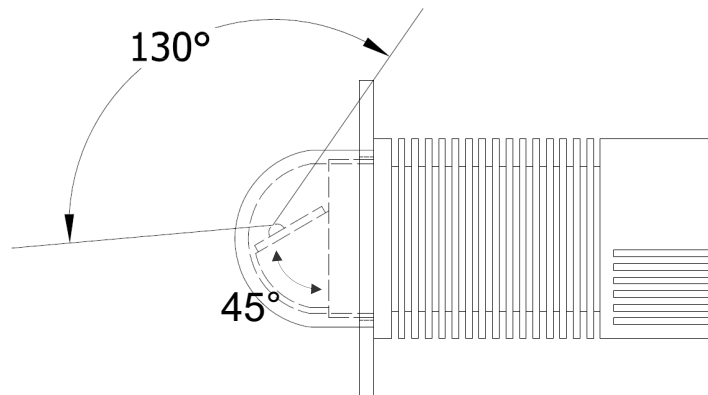

STROBE-BRIK™

SB-040QD and SB-041QD Single Color and RGB LED Strobes
Architectural-use, DMX-controlled SB-04XQD series

Shown with mounting disk

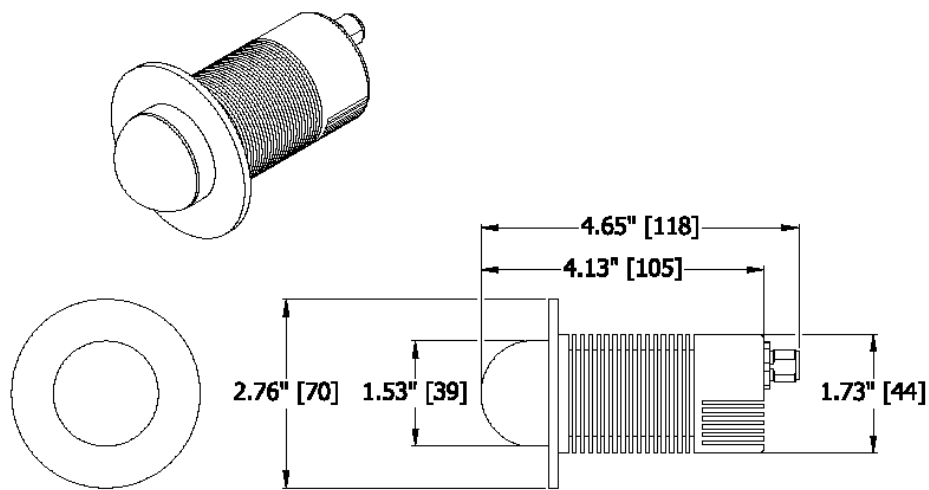

Shown with vibration clamp

