



FAUXFLAME® Specifications

F12 Specifications

12 Volts, AC
25 Watt Maximum Load
Use with Halogen/Incandescent Lamps only

F12DC Specifications


12 Volts, DC
25 Watt Maximum Load
Use with Halogen/Incandescent Lamps only

F110 Specifications

110 Volts, AC
200 Watt Maximum Load
Use with Halogen/Incandescent Lamps only

Module Dimensions:

2 3/8" x 1 3/8" x 13/16"

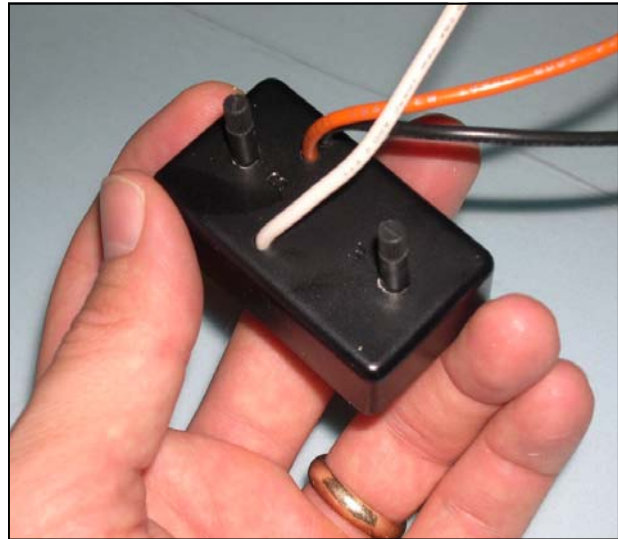

IMPORTANT!

Fauxflame modules are designed for professional installation only. Failure to install in accordance with these instructions and with the Authority Having Jurisdiction for equipment of this type will void the warranty. Please contact Birket Engineering, Inc. with any application questions prior to installation.

GENERAL NOTES:

1. Module for use with incandescent lamps only.
2. Do not use with external dimmer or photovoltaic controls.
3. Module generates heat. Do not install module in any location subject to heating by lamps or other sources.
4. Do not install module in direct sunlight.
5. Do not install module in junction box or fixture subject to temperatures above 110°F.

DISCLAIMER AND WARRANTY

Birket Engineering, Inc. warrants the Fauxflame modules to be free from functional defects, assuming proper installation in accordance with supplied instructions, for a period of one year. Birket Engineering will correct such defects by repair or replacement, at our option, if the product is returned postage prepaid with proof of original purchase date. Defects resulting from incorrect wiring, short circuit or overload can be verified, and are specifically excluded from this warranty.

Birket Engineering, Inc. has been thrilling the world's audiences with custom electrical & software systems since 1984. Located in beautiful central Florida, the company's work may be found in every Walt Disney Company and Universal Studios theme park, in Las Vegas, on Broadway, and at the finest entertainment destinations around the globe. See www.birketspecialtylighting.com.